


O - Siphon

VIT - 25 - OS


- PN 25
- Material : Steel ST 35.8 Coated
- Connection Size : BSP 1/2"



U - Siphon

VIT - 25 - US


- PN 25
- Material : Steel ST 35.8 Coated
- Connection Size : BSP 1/2"



Pressure Gauge Cock

VIT - 25 - GC



- PN 25
- Material : Brass
- Connection Size : 1/2"



Drain Cock

VIT - 10 - DBC

- PN 10
- Material : Brass
- Hose Connection with cap
- Connection Size : 1/2"

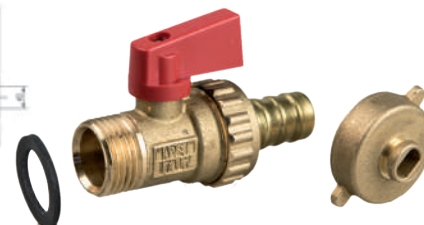

valveIT Pulsation Dampener

VIT - 10 - PD

Application & Features

The use of pressure surge reducers extends the pressure gauges' life cycle and enhances reading accuracy. The passage cross section can be adjusted with an adjusting screw and adapted to individual operating conditions. Pressure surge reducers protect pressure gauges from pressure surges and pulsations of the measuring medium.

