

VITIA - Butterfly valve DN 25 - 300

Description

Centric butterfly valve with elastomer liner for HVAC applications, swimming pools and irrigation.

Product features

- Body construction AP1 Wafer DN 25-300 (VIT16IA-WAF)
AP3 Lug DN 25-300 (VIT16IA-LUG)
- Face to face dimension according to ISO 5752/20,
EN 558-1/20
- Top flange according to EN ISO 5211
- Max. working pressure 16 bar (DN25-150),
10 bar (DN200-300).
- Rating PN6, PN10, PN16,
ANSI cl. 150
- Temperature range -20°C ÷ 130°C
- Tightness test according to EN
12266-1/P12 leakage rate
A, test fluid water
The butterfly valves VITIA meet



The safety requirements of the pressure Equipments Directive 2014/68/EC (PED) appendix 1 for fluids of the groups 1 and 2. AP1 Wafer



AP1 Wafer
VIT16IA-WAF



AP3 Lug
VIT16IA-LUG

Construction

- 1 Body (extended valve neck allowing insulation)
- 2 Blow out proof 2 piece shaft*
- 3 Disc
- 4 Liner
- 5 Square driven disc
- 6 External shaft sealing
- 7 Retaining washer (blow out protection)
- 8 Dew point blocker
- 9 High performance spring**
- 10 Centering holes for multiple flange rating

*One piece shaft for sizes DN25/32

**No spring for sizes DN25/32



Type code

AP1 . 100 . 3 3 . 2KR . 41 . 4Co. EC
 1 2 3 4 5 6 7 8

1	Type	AP1	Wafer	DN25-300	
		AP3	Lug	DN25-300	
2	Nominal diameter	25-300	mm		
		2	10 bar	DN200-300	
3	Working pressure	3	16 bar	DN25-150	
		for AP1 Wafer			
4	Rating	3	PN6/10/16, ANSI cl. 150		
		for AP3 Lug			
		2	PN10	AP3 Lug DN200-300	
		3	PN10/16	AP3 Lug DN25-150	
			PN16	AP3 Lug DN200-300	
5	Body	2KR	Ductile iron EN-GJS-400-15 Epoxy (Resicoat®) coated 200μ		
6	Shaft	41	Stainless steel 1.4021 (AISI420)		
7	Disc	2AR	Ductile iron EN-GJS-400-15 Epoxy coated		
		4C0	Stainless steel 1.4408 ≈ CF8M		
8	Liner	EC	EPDM HT (-20°C ... 130°C)		

Kv values m³/h

DN	25/32	40	50	65	80	100	125	150	200	250	300
90°	40	50	100	210	360	650	1050	1620	2800	2800	6800


$$c_v = k_v \cdot 1,16$$


Dimensions

DN 25-32


DN 40-50

DN 65-100

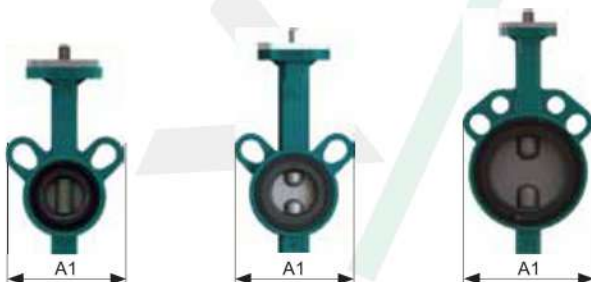

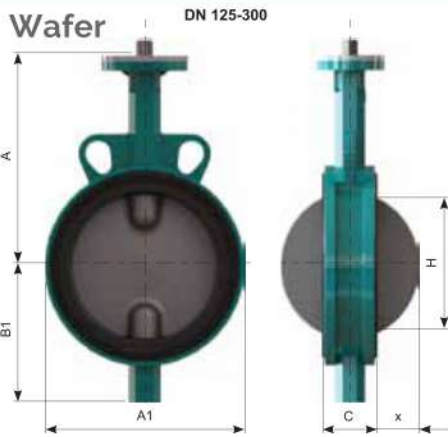

DN	A	B1	C	A1	H'	x'	[kg]
(25)32	110	51	30	101	19	3	1,0
40	130	55	33	108	28	6	1,3
50	135	72	43	120	32	6	1,8
65	150	82	46	138	50	11	2,3
80	160	92	46	142	69	19	2,3
100	180	110	52	162	88	26	3,9
125	195	128	56	181	115	36	5,0
150	210	141	56	205	141	48	5,9
200	240	174	60	260	194	72	9,3
250	279	201	68	310	240	91	17,0
300	315	234	78	362	290	112	23,7

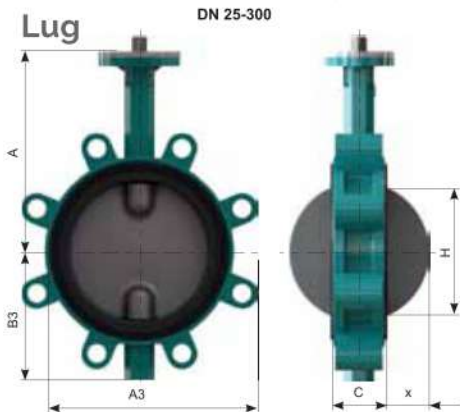


DN	A	B3	C	A3	H'	x'	[kg]
25	110	51	30	101	19	3	1,5
32	110	51	30	101	19	3	1,5
40	130	54	33	108	28	6	1,9
50	135	72	43	116	32	6	2,4
65	150	82	46	131	50	11	4,8
80	160	88	46	188	69	19	4
100	180	102	52	219	88	26	6,2
125	195	116	56	248	115	36	7,7
150	210	128	56	274	141	48	8,4
200	240	161	60	332	194	72	16,6
250	279	199	68	402	240	91	23,5
300	315	234	78	472	290	112	32,4

DN25/32 sizes have a single piece passing shaft so the sketch differs

Dimensions


Handlever

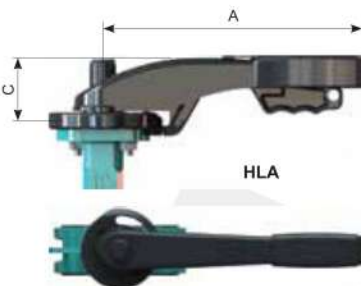

Aluminium, Epoxy coated

DN		A	C	[kg]
25-40	VITHLA F0508 MM180	180	41	0.4
50-65	VITHLA F0511 MM180	180	41	0.4
80	VITHLA F0511 MM240	243	43	0.5
100	VITHLA F0711 MM240	243	43	0.5
125-150	VITHLA F0714 MM340	340	51	0.6
200	VITHLA F0717 MM340	340	51	0.6

Gearbox

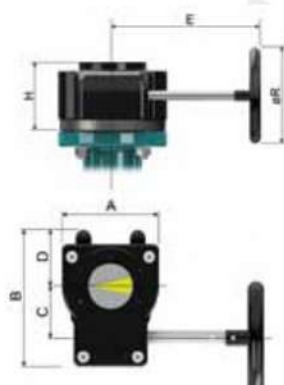

Aluminium, Polyurethane coated

DN		A	B	C	D	E	H	ØR	n*	[kg]
25-40	VITGB232 F0708 MM100	80	114	42,5	48	121	53	100	10	0,8
50-100	VITGB232 F0711 MM100	80	114	43	48	121	53	100	10	0,8
125-150	VITGB232 F0714 MM100	80	114	43	48	121	53	100	10	0,8
200	VITGB232 F0717 MM160	80	114	43	48	179	59	160	10	0,9
250	VITGB232 F01022 MM250	100	131	50	56	209	76	250	9,25	1,6
300	VITGB232 F01022 MM250	100	131	50	56	209	76	250	9,25	1,6

* n = Handwheel turns ON/OFF

Further documentation

Pneumatic actuators, Electric actuators, Accessories according to separate data sheets.
 Installation guide, Maintenance guide, Flanges: Please consult these guides for the installation and maintenance of our butterfly valves.

