




®

CORPORATION

EMERGENCY RELIEF VENT

MODEL 2000A

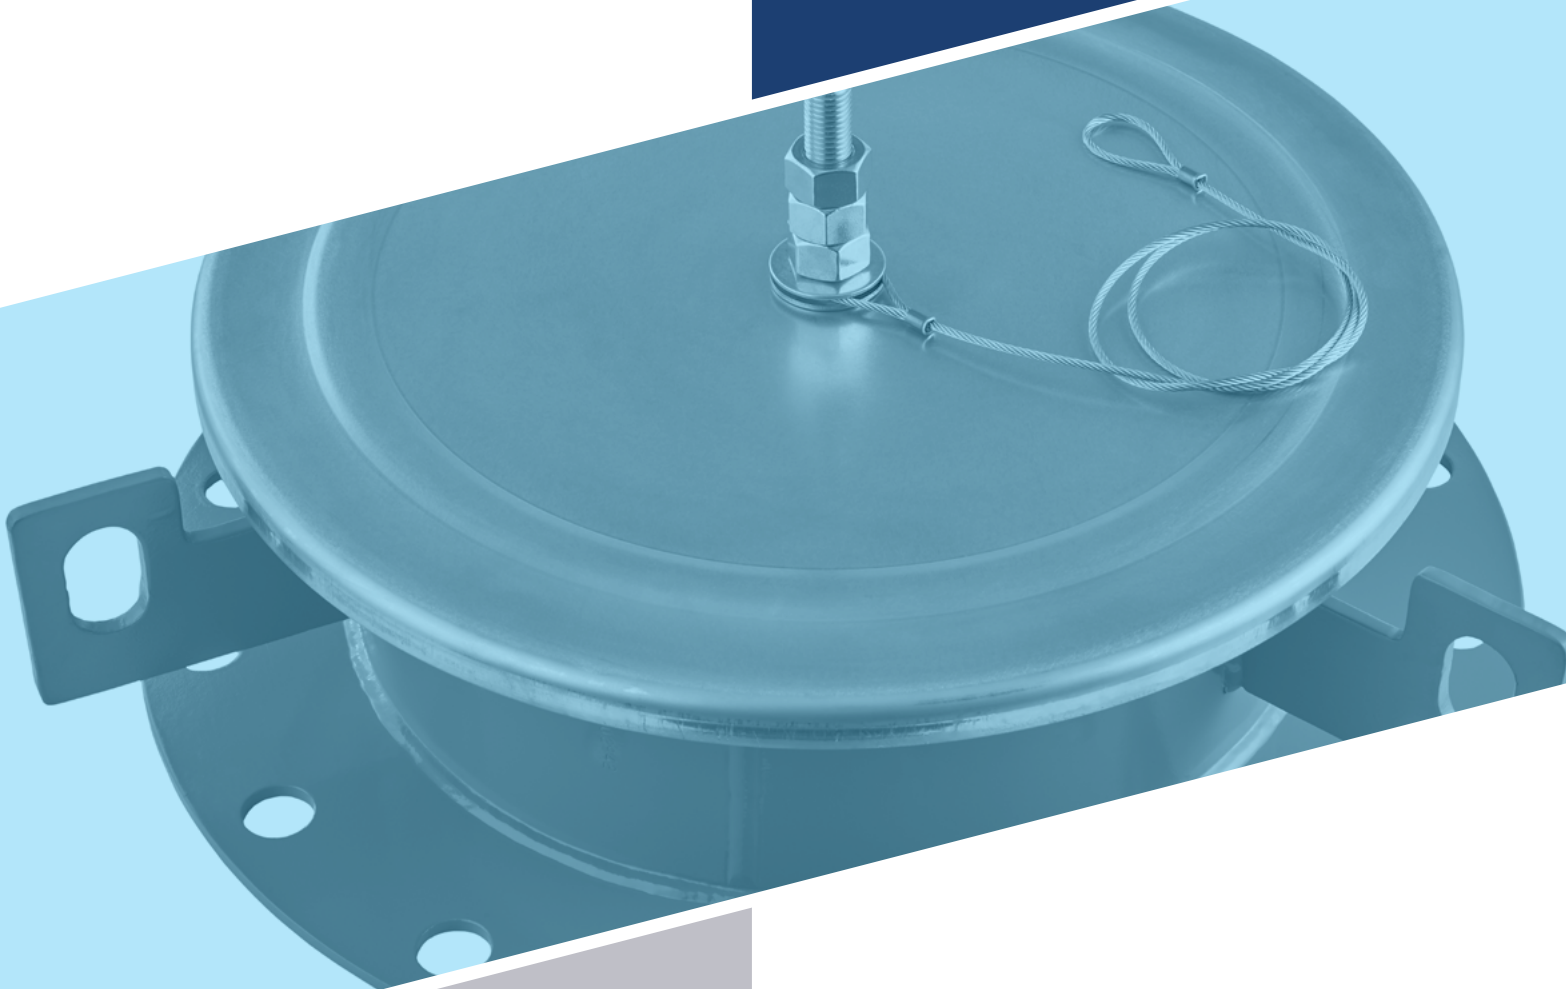

MODEL 2000A

The Groth Model 2000A is designed to provide emergency relief capacity beyond that furnished by the normal operating pressure relief valve on the tank. The valve protects the tank against rupture or explosion that could result from excessive internal pressures caused by fire. Removable stops can be provided which restrict the lift of the cover.

Technical Details

- Sizes: 16" (DN 400) , 20" (DN 500) and 24" (DN 600)
- Pressure Setting: 1.5 oz/in² to 16 psig (6.46 mbarg to 68.9 mbarg)
- Vacuum Settings: 0.5 oz/in² to 4 psig (2.15 mbarg to 17.2 mbarg)
- Materials: Carbon Steel, Fiberglass , Stainless Steel, special materials upon request
- ATEX Certified
- Manufactured in an ISO 9001 Certified Manufacturing Facility

Features

- Grounding Cable connects the head and flange
- Cushioned Air pallet
- Peripheral Guiding

Options

- Steam Jacket
- Buna-N, Fluoropolymer, FKM
- ANSI 150# and API 650 drilling classes



GROTHCORP.COM